

UJF-3042HG

UJF-3042FX
UV PRINTER



UV LED flatbed desktop printer...



Mimaki

The world imagines... Mimaki delivers



The most versatile UV LED flatbed printer on the market

Providing a unique solution for short runs and on-demand printing the UJF-3042 series offers unrivalled versatility and high quality print reproduction on an almost unbelievable range of materials, products and substrates. With its compact desktop format the UJF-3042 series offers unlimited possibilities to the end user.

ENGINEERING EXCELLENCE AND CREATIVE INNOVATION

Founded in Japan in 1975, Mimaki Engineering has steadily grown by reputation and influence into a global company with large operational bases in Asia and the Pacific, United States and Europe.

Renowned for award-winning performance, peerless build quality and innovative technology, Mimaki has established itself as a leading manufacturer of wide-format inkjet printers and cutting machines for the sign and graphics, textile and apparel and industrial markets. In addition, Mimaki also provides a comprehensive range of supporting products; hardware, software and associated consumable items, such as inks and cutting blades.

From outdoor signage and billboards to interior decoration and furnishing, from packaging and labels to promotional gifts and apparel, Mimaki is committed to developing technology that sets new industry standards, producing machines and products that turn the imagination of our customers into breath-taking reality.

... **Mimaki delivers**

UJF-3042 Series delivers ...

- Outstanding print quality and reliability
- Space-saving compact desktop design
- Direct printing on substrates up to 50 mm thick (FX model) and 150 mm (HG model)
- Variable data and imprint capabilities
- Simultaneous printing of colour and white
- White ink and clear varnish
- Automatic primer application function
- HG Model features additional two print channels for 6-colour printing plus white and clear inks

UV LED CURING
300 x 420 mm MAX. PRINT SIZE
1440 x 1200 dpi MAX. RESOLUTION
MAX. MEDIA THICKNESS 150 mm (HG model)
4 / 6 COLOUR PRINT + WHITE + CLEAR
VARIABLE DATA PRINTING

UJF-3042FX
UV PRINTER

UJF-3042HG



Additional print head + increased print height facilitates wider range of media.

Create ... Promotional gifts, display cards, name badges, control panels, pens, stationery, fridge magnets, key rings, gift boxes, USB sticks, mobile phone and laptop cases, small format signage...

KEY TECHNICAL FEATURES ...


3 types of UV inks

- **LH-100** hard UV ink excels in scratch and chemical resistance as well as colour reproduction. (CMYK, W, Ci, Pr)
- **LF-200** flexible UV ink enables stretching of ink up to 200% during post-processing work. (CMYK, W)
- **LF-140** offers strong gradation in 6-colour printing and is more flexible than LH-100. (CMYK, Lc, Lm, W, Pr)*


* LF-140 ink set does not include clear ink. You can use a combination with LH-100 clear ink

Simultaneous white ink under and overprint

Print outstandingly colourful, bright images on transparent and coloured substrates with white ink under or overprint without slowing down print speed.



4/6 colours only
Without white ink as a basis for overprinting, the colours are not as vivid as they should be.



4/6 colours + white
With the white ink overlay print, the images are bright and vivid.

< Sample prints on transparent acrylics >

Add value with glossy and layered finishes

Add value to your prints using clear ink to realise glossy finishes and to further protect your image.




Useful functions to ensure print quality

- **Mimaki Spray Suppressor System** prevents satellite ink drops, ensuring higher print reliability, consistency, and quality.
- **Nozzle Recovery Function** temporarily restores print quality, reducing potential downtime if maintenance issues should arise.
- **Mimaki Circulation Technology (MCT)** is a newly developed white ink circulation system that prevents pigment sedimentation and reduces ink waste. Available on UJF-3042HG.

Automatic primer application functionality

Both models incorporate an automatic primer feature. The new inkjet primer cartridges are simply inserted into the corresponding ink slot of UJF-3042, enabling the primer to specifically target the print image area only.

(*) When printing with primer and white or clear ink, production speed is reduced by approximately 50%. Please always test your intended materials before using primer.

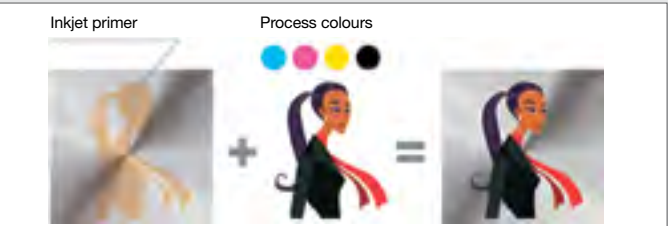

Unlimited possibilities




New generation output software with 16 bit rendering (a standard item)

The high performance RIP software is designed to fully enable all advanced features of UJF-3042 Series



16 bit rendering eliminates tone jump and produces fine colour reproduction. Different images can be freely nested on the RIP. The web update function has been newly added to Rasterlink Pro 5 to easily achieve both software update and profile download.



[8 bit rendering]
Tone jumps are likely to occur



[16 bit rendering]
Smooth gradation without tone jump

Specifications

Item		Specifications
Print head		On-demand Piezo head
Print resolution		720 x 600 dpi, 1440 x 1200 dpi
Ink	Kind	LH-100 hard UV curable ink (C/M/Y/K/W/Ci)
		LF-200 flexible UV curable ink (C/M/Y/K/W)
		LF-140 (C/M/Y/K/Lc/Lm/W)
	Capacity	220 ml cartridge / 600 ml ink pack
Inkjet primer		PR-100 (220 ml cartridge / 600 ml ink pack)
Maximum print size		Width: 300 mm, Length: 420 mm
Media	Max. size	Width: 364 mm, Length: 463 mm
	Thickness	(FX) Up to 50 mm / (HG) Up to 150 mm
	Weight	Up to 5 kg
Media set device		Air suction by vacuum
UV device		UV LED
Interface		USB 2.0
Applicable standard		VCCI class A, FCC class A, UL, RoHS Directive, CE Marking
Power specifications		AC 100 – 240 V (Automated voltage conversion)
Power consumption		Less than 0.5 kVA
Operational environment	Temperature	20 – 35°C (68 – 95°F)
	Humidity	35 – 65% Rh
	Dust	Equivalent to normal office level
Dimensions (W x D x H) / Weight		(FX) 1,200 x 1,090 x 770 mm / 113 kg
		(HG) 1,200 x 966 x 920 mm / 130 kg

Also available : UJF-706 High Precision UV Flatbed Printer

Innovative solution for printing companies and manufacturers requiring on-demand, short run production, and variable data printing.

- Printing on substrates up to 150 mm thick
- Maximum print area of 700 mm x 600 mm
- Optional roll unit available for continuous on-demand printing of roll-to-roll substrates and thin flexible packaging films.



• Some of the samples in this folder are artificial renderings • Specifications, design and dimensions stated in this folder may be subject to change without notice (for technical improvements, etc.)
• The corporate and merchandise names written on this folder are the trademark of the respective corporations • Inkjet printers print using extreme fine dots, so colours may vary after replacement of the printing heads, also note that if using multiple printer units, colours could vary slightly from one unit to other unit due to slight individual differences • Compositor's errors reserved

Mimaki is exclusively distributed in the UK & Ireland by:

Hybrid Services Ltd

N° 3, Gateway, Crewe, Cheshire. CW1 6YY

01270 501 900

info@hybridservices.co.uk

www.hybridservices.co.uk

@HybridServices

hybrid
MIMAKI Exclusive Distributors

Supplies

Item		Item No.	Remarks
Dedicated UV ink	LH-100	SPC-0659 C/M/Y/K/W/Ci	220 ml cartridge
		SPC-0597 C/M/Y/K/W/Ci	600 ml ink pack
	LF-200	SPC-0660 C/M/Y/K/W	220 ml cartridge
		SPC-0591 C/M/Y/K/W	600 ml ink pack
	LF-140	SPC-0727 C/M/Y/K/Lc/Lm/W	220 ml cartridge
		SPC-0728 C/M/Y/K/Lc/Lm/W	600 ml ink pack
Inkjet primer	PR-100	SPC-0731	220 ml cartridge
		SPC-0732	600 ml ink pack
Eco case		OPT-J0237	8 cases

1. 600 ml ink pack requires eco cartridge (OPT-J0237). Eco cartridges can be used repeatedly by replacing ink packs.
2. Inkjet primer cannot be used in conjunction with LF-200 inks.
3. Clear ink is not available for LF-140 inks. However, LH-100 clear ink can be used in combination with LF-140 inks.

Inks and substrates

- Please note that properties, adhesion, weather resistance, etc. of ink and substrates can vary. Therefore please test materials before printing.
- Some substrates require primer before printing. Please test materials beforehand or ask your sales representative.

Mimaki

www.mimakieurope.com info@mimakieurope.com @MimakiEurope

Mimaki Europe B.V. Stammerdijk 7E, 1112 AA Diemen, The Netherlands Tel: +31 (0)20 4627640